




- Product type: PCB terminal,
- Wiring method: spring connection,
- Spacing: 10.16mm,
- Voltage: 600V,
- Current: 60A,
- Number of digits: 2-16P

BASICPARAMETERS

Pitch:	10.16mm
Rated voltage-UL:	600V
Rated current-UL:	60A
Rated voltage-IEC:	1000V
Rated current-IEC:	76A
Wire range-UL:	20-6AWG
Wire range-IEC:	0.5-16mm ²
Pole number:	02~16P
Insulation Material:	PA66 UL94 V-0
Material & Plating of Current carrier:	Copper alloy, Tin plated
Insulation Resistance:	500MΩ or more at DC500V
Withstanding Voltage(1Min):	4200V
Rated surge voltage:	-
Wire clamp unit Screw, torque Max.:	M4, 1.2Nm Max
Material of Clamp spring:	-
Wire stripping length:	10.0-11.0mm
Operating temperature:	-40°C ~ +105°C
Soldering recommend:	Wave soldering, 260°C 5S Max(Single Wave), 260°C 10S Max(Double Wave)
Approval:	

DIMENSION DRAWING

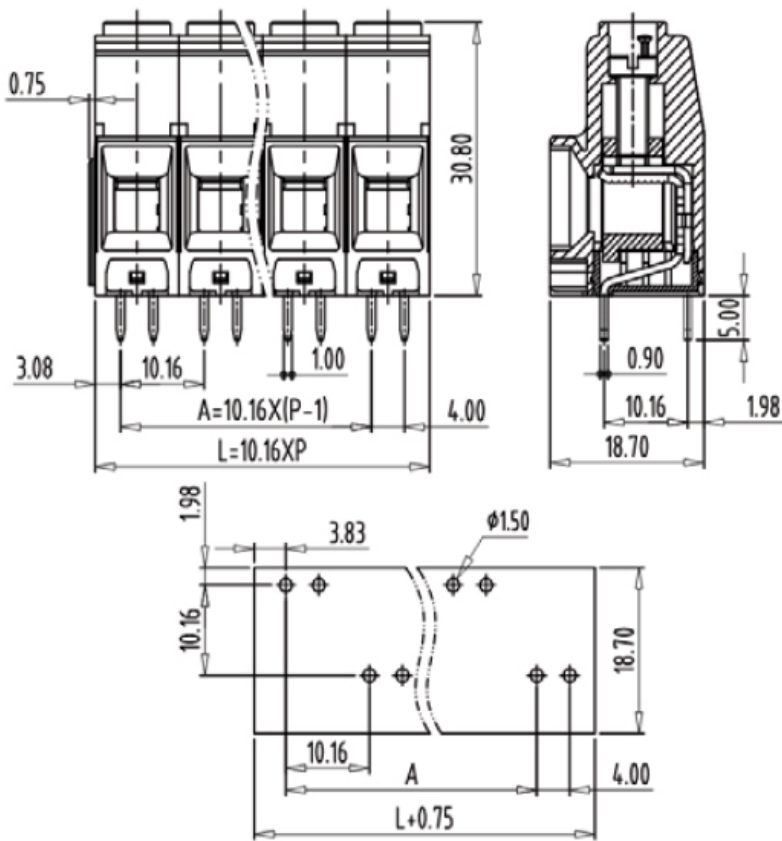

订购产品

Product Name	Pitch	Pole number	Part No.	3D Download	2D Download
Fixed Terminal	10.16mm	02~16P	SA1016-04		

Data download

PRODUCT CATALOG	Terminal Selection Manual
-----------------	---