




- Product type: Connectors with spring-cape clamp,
- Wiring method: spring clip connection,
- Spacing: 5.00mm(.197" ),
- Voltage: 300V,
- Current: 15A,
- Number of digits: 2-24P

## BASICPARAMETERS

Pitch:	5.00mm(.197" )
Rated voltage-UL:	300V
Rated current-UL:	15A
Rated voltage-IEC:	320V
Rated current-IEC:	20A
Wire range-UL:	22-14AWG
Wire range-IEC:	2.5mm <sup>2</sup>
Pole number:	02~24P
Insulation Material:	PA66 UL94 V-0
Material & Plating of Current carrier:	Copper alloy, Tin plated
Insulation Resistance:	500MΩ or more at DC500V
Withstanding Voltage(1Min):	2200V/1Min
Rated surge voltage:	4.0KV
Wire clamp unit Screw, torque Max.:	-
Mounting Screw, torque:	-
7.0 Material of Clamp spring:	Stainless steel(GrNi)
Wire stripping length:	9.0mm
Operating temperature:	-40°C ~ +115°C
Soldering recommend:	-
Approval:	

## DIMENSION DRAWING

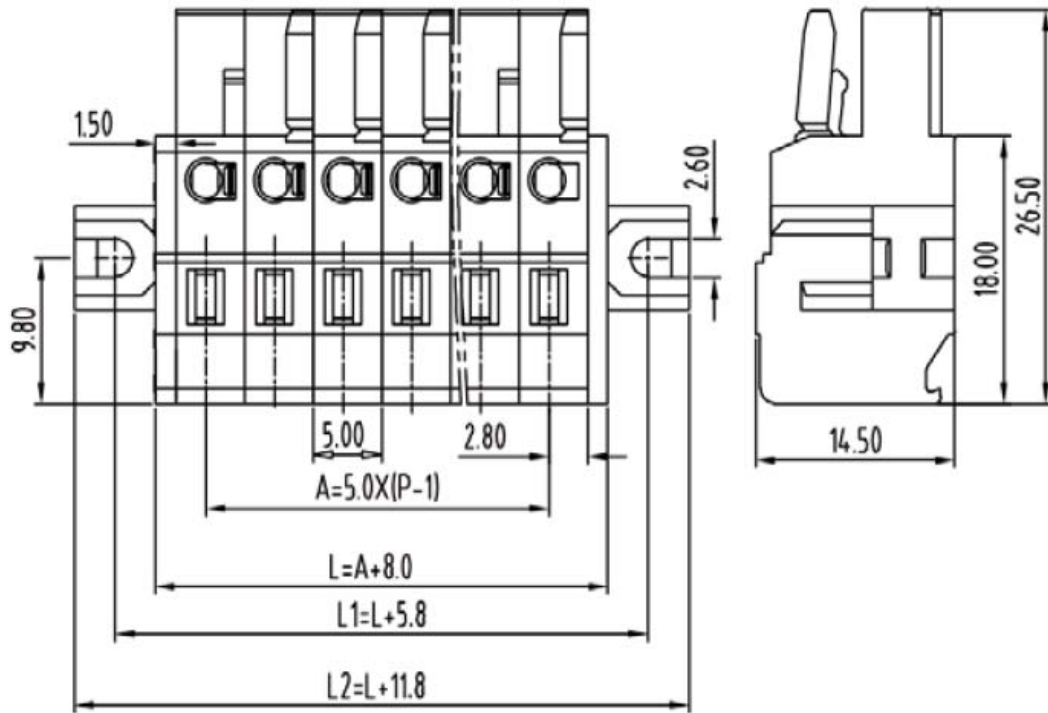

## 订购产品

Product Name	Pitch	Pole number	Part No.	3D Download	2D Download
MCS Terminal	5.00mm(.197" )	02~24P	45010X/010		

## Data download

PRODUCT CATALOG	<a href="#">Terminal Selection Manual</a>
-----------------	---