




- 欧标连接器 M23系列，信号型
- 结构类型：直式金属组装对接插头，
- 接口类型：针型，
- 芯数：6,7,9,12,17pin，
- 连接方式：压接，
- 屏蔽：是，
- 认证：CE RoHS，

机械参数

壳体材料：	黄铜镀镍
胶芯材料：	PBT/PA66
密封材料：	环氧树脂/橡胶
插针材料：	黄铜/磷铜镀金
成型材料：	TPU/PVC
接线范围：	6~10mm
接触阻抗：	≤5 mΩ
插拔次数：	≥500 次
适用温度：	-40°C ~ +125°C
防护等级：	IP67

尺寸图

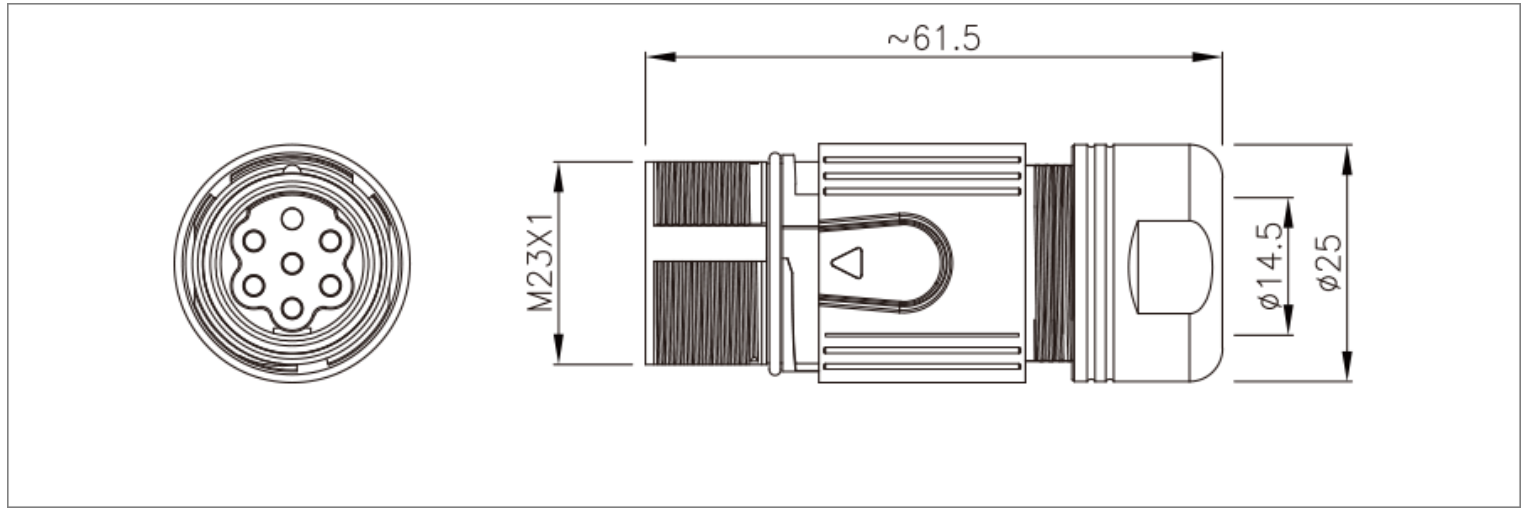

接线定义

芯位	线芯颜色	导体规格
6芯		
1	BK U	1.5mm ²
2	BN V	1.5mm ²
3	GNYE	1.5mm ²
4	BK	1.5mm ²
5	WH	1.5mm ²
6	BN K	1.5mm ²





芯位	线芯颜色	导体规格
8芯		
1	BK 1	1.5mm ²
PE	GNYE	1.5mm ²
3	BK 2	1.5mm ²
4	BK 3	1.5mm ²
A	BK 5	0.75mm ²
B	BK 6	0.75mm ²
C	BK 7	0.75mm ²
D	BK 8	0.75mm ²

芯位	线芯颜色	导体规格
12芯		
1	PK	0.25mm ²
2	RD	0.25mm ²
3	BK	0.25mm ²
4	BU	0.25mm ²
5	BN	0.25mm ²
6	GN	0.25mm ²
7	VT	0.25mm ²
8	GY	0.25mm ²
9	外部护套	
10	WH	0.5mm ²
11	NC	
12	BN	0.5mm ²

芯位	线芯颜色	导体规格
17芯		
1	YE	0.14mm ²
2	GN	0.14mm ²
3	RD	0.14mm ²
4	NC	
5	BU	0.14mm ²
6	NC	
7	BNBU	0.5mm ²
8	GNBK	0.22mm ²
9	GNRD	0.22mm ²
10	BNRD	0.5mm ²
11	BK	0.14mm ²
12	BN	0.14mm ²
13	OG	0.14mm ²
14	WHBK	0.14mm ²
15	BNGY	0.22mm ²
16	BNYE	0.22mm ²
17	内部护套	

*接线定义按常规标准，如按协议或者其他请联系我司业务。

电气参数

芯数	P型	额定电流	额定电压		导体规格		E型
			A/C	D/C	AWG	mm ²	
6		20A	300V	300V	14	2.5	
7		20A	300V	300V	14	2.5	
9		8A	150V	150V	16	1.5	
9P(8+1)		8A/20A	300V	150V	16/14	1.5/2.5	
12		8A	150V	150V	18	1	
17		8A	150V	150V	18	1	

订购产品

产品名称	产品型号-(P型)	产品型号-(E型)	芯数	3D下载	2D下载
M623信号直式针型对接组装式插头-压接式-6芯	M623-P6P-GCK14.5	M623-P6E-GCK14.5	6		P/E
M623信号直式针型对接组装式插头-压接式-7芯	M623-P7P-GCK14.5	M623-P7E-GCK14.5	7		P/E
M623信号直式针型对接组装式插头-压接式-9芯	M623-P9P-GCK14.5	M623-P9E-GCK14.5	9		P/E
M623信号直式针型对接组装式插头-压接式-8+1芯	M623-P9PP-GCK14.5	M623-P9PE-GCK14.5	8+1		P/E
M623信号直式针型对接组装式插头-压接式-12芯	M623-P12P-GCK14.5	M623-P12E-GCK14.5	12		P/E
M623信号直式针型对接组装式插头-压接式-17芯	M623-P17P-GCK14.5	M623-P17E-GCK14.5	17		P/E

资料下载

产品目录	STA思大-欧标连接器选型画册、NMEA专用连接器
EMC	连接器欧标系列-EMC证书 CE ROHS REACH IP
RoHS	ROHS证书